


KİLİTLEME HAT TİPİ / PILOT OPERATED CHECK VALVE


YÜKSEK BASINÇ SAKLAMA ÖZELLİĞİ

400 BAR

ÇELİK GÖVDE

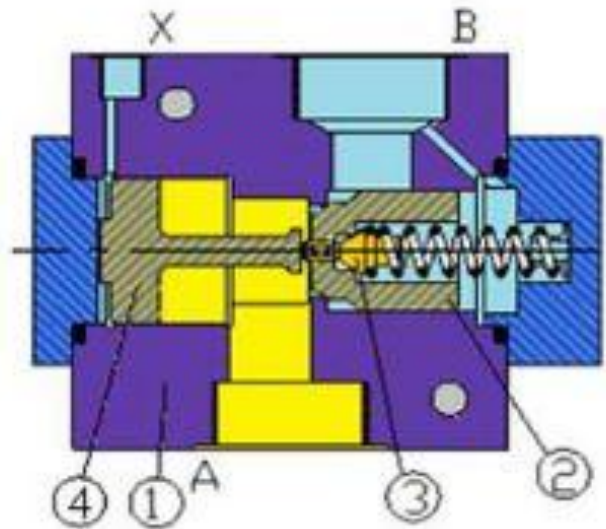

YUMŞAK ÖN AÇMA ÖZELLİĞİ

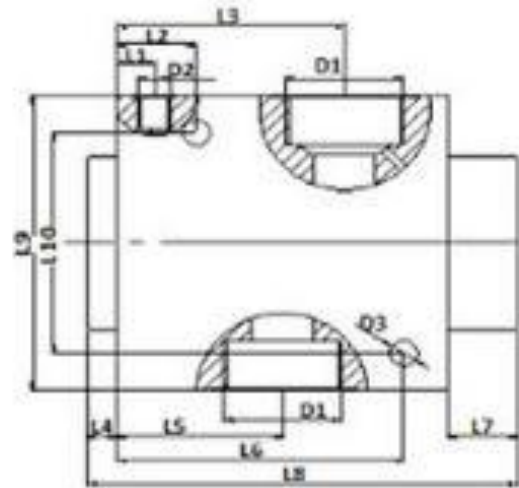

	1/2"	3/4"	1"
L1	12,5	10	10
L2	20	20	10
L3	31	26	20
L4	10	10	10
L5	34	41	41
L6	22	28	28
L7	10	20	20
L8	100	125	125
L9	20	100	100
L10	25,0	20	20
D1	1/2"	3/4"	1"
D2	1/4"	1/4"	1/4"
D3	11	11	11

ÖZGİRGENLİK

1/2"	3/4"	1"
100	200	300



KİLİTLEME HAVELİ TİPİ / PILOT OPERATED CHECK VALVE

YÜKSEK BASINÇ SAKLAMA ÖZELLİĞİ


250 BAR

ÇELİK GÖVDE

REKOR BAĞLANTILI

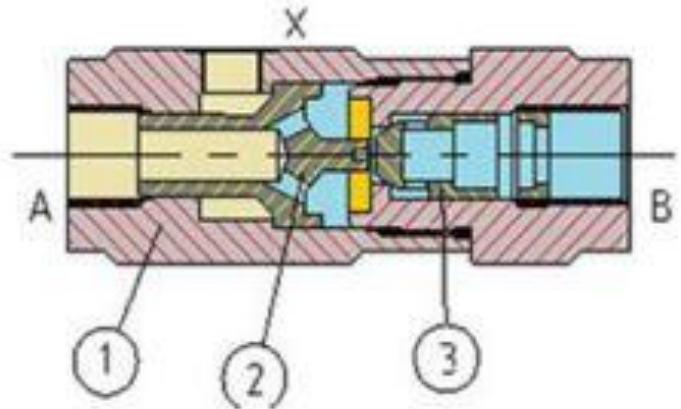

YUMŞAK ÖN AÇMA ÖZELLİĞİ

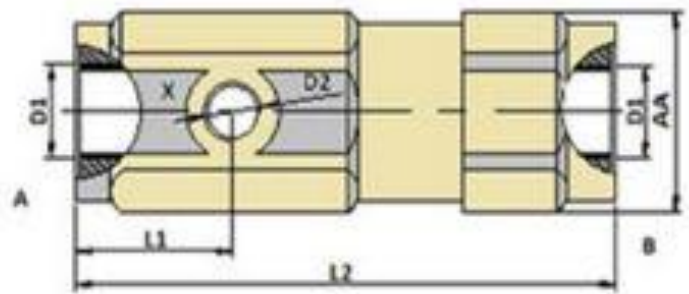

	1/2"	3/4"
L1	38	38
L2	124	131
D1	1/2"	3/4"
D2	1/4"	1/4"
AA	41	55

GEÇİRGENLİK LT	1/2"	3/4"
	60	100